



10 FOOT FREE STANDING RACK




Visit www.torquefitness.com for customizing options and for pre-configured packages

Model number	XRFS-6-10
Footprint	123.9" x 83.4" (314.8 cm x 211.9 cm)
Height	Frame: 107.1" (272 cm) Optional Ball Target: 126.7" (322 cm)
Minimum Required Live Area	12.8' x 19.0' (3.9 m x 5.8 m)
Warranty	10 year frame and welds/1 year parts/90 days misc.

TOP VIEW

Note: X-Racks are required to be bolted to a concrete sub-floor






14 FOOT FREE STANDING RACK

9' 3" x 3" 11 Gauge Uprights with optional colors

Double Crosses can be mounted for use with fat (2") or skinny (1.25") bar pull-up bar. (other pull-up options available)

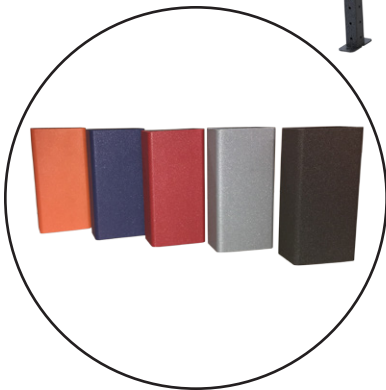


J-Hooks with UHMW wear guards that protect bar and upright

Visit www.torquefitness.com for customizing options and for pre-configured packages

Model number	XRFS-6-14
Footprint	169.0" x 83.4" (429.2 cm x 211.9 cm)
Height	Frame: 107.1" (272 cm) Optional Ball Target: 126.7" (322 cm)
Minimum Required Live Area	19.1' x 19.0' (5.8 m x 5.8 m)
Warranty	10 year frame and welds/1 year parts/90 days misc.


TOP VIEW

Note: X-Racks are required to be bolted to a concrete sub-floor





20 FOOT FREE STANDING RACK

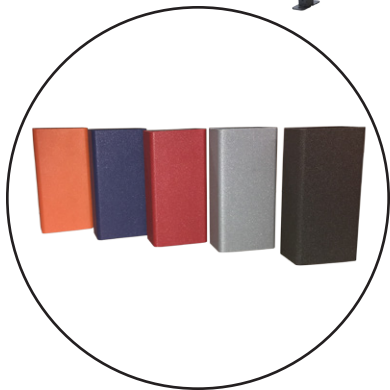


Visit www.torquefitness.com for customizing options and for pre-configured packages

Model number	XRFS-6-20
Footprint	243.9" x 83.4" (619.6 cm x 211.9 cm)
Height	Frame: 107.1" (272 cm) Optional Ball Target: 126.7" (322 cm)
Minimum Required Live Area	22.8' x 19.0' (7.0 m x 5.8 m)
Warranty	10 year frame and welds/1 year parts/90 days misc.

TOP VIEW

Note: X-Racks are required to be bolted to a concrete sub-floor

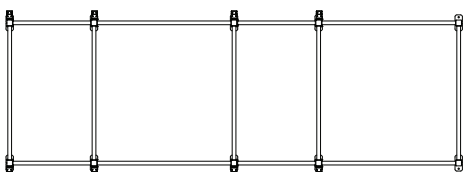




24 FOOT FREE STANDING RACK

Double Crosses can be mounted for use with fat (2") or skinny (1.25") bar pull-up bar. (other pull-up options available)

9' 3" x 3" 11 Gauge Uprights with optional colors

J-Hooks with UHMW wear guards that protect bar and upright

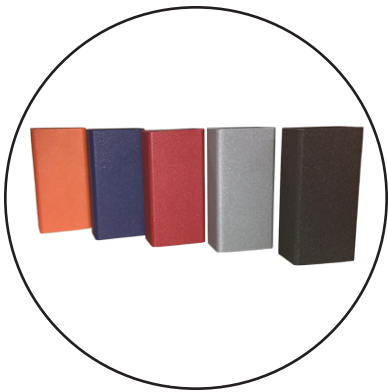

Visit www.torquefitness.com for customizing options and for pre-configured packages

Model number	XRFS-6-24
Footprint	289.0" x 83.4" (734.0 cm x 211.9 cm)
Height	Frame: 107.1" (272 cm) Optional Ball Target: 126.7" (322 cm)
Minimum Required Live Area	29.1' x 19.0' (8.9 m x 5.8 m)
Warranty	10 year frame and welds/1 year parts/90 days misc.

TOP VIEW

Note: X-Racks are required to be bolted to a concrete sub-floor

